


# DATASHEET

## SN MALAKA PANORAMIC

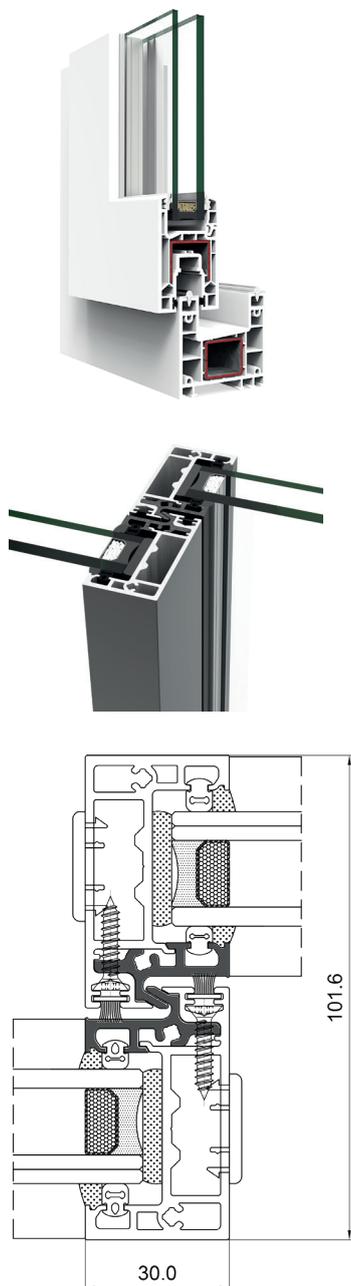

<b>ENERGY EFFICIENCY</b>	Uf ≥ 1,3 (W/m²K) Please consult typology, dimensions and glazing.	<b>Thermal Transmission Coefficient</b>		
<b>ACCOUSTIC INSULATION</b>	26 mm Rw = 38 dB	<b>Maximum glazing</b> <b>Maximum acoustic insulation</b>		
<b>CATEGORIES ACHIEVED AT TEST CENTRE</b>	Protection against atmospheric agents			
	Class 4	<b>Permeabilidad al aire</b> (UNE-EN 12207)		
	Class 7A	<b>Water tightness</b> (UNE-EN 12208)		
	Class C5	<b>Wind resistance</b> (UNE-EN 12210)		
	Reference test window 1.23 x 1.48 m / 2 sashes.			
<b>CLASIFICACION</b>	Class A ≥ 2,5 mm	<b>Profile thickness</b>		
	Severe weather	<b>Weather</b>		
	Class II	<b>Impact</b>		
<b>SECTIONS</b>	70 mm Frame	46 mm Sash		
<b>MINIMALIST CENTRAL KNOT</b>	30 mm (Aluminum)			
<b>MAXIMUM DIMENSIONS (by sash)</b>	Width (L) = 1400 mm	<b>Window</b>		
	Height (H) = 1800 mm			
	Width (L) = 1800 mm	<b>Balcony</b>		
	Height (H) = 2600 mm			
<b>MAXIMUM WEIGHT SASH</b>	70 Kg Window	200 Kg Balcony		
<b>Weather stripping</b>	Built-in double brush Seal			
<b>OPENING POSSIBILITIES</b>	<b>Sliding door</b>			
	Two Sashes	Three Sashes	Four Sashes	Six Sashes
<b>FINISHES</b>	Optionally bicoloured White	Coloured wrapping Wood-imitation wrapping		

Air permeability  
(UNE-EN 12207):  
Class

4

Wind resistance  
(UNE-EN 12210):  
Class

C5

Water tightness  
(UNE-EN 12208):  
Class

7A